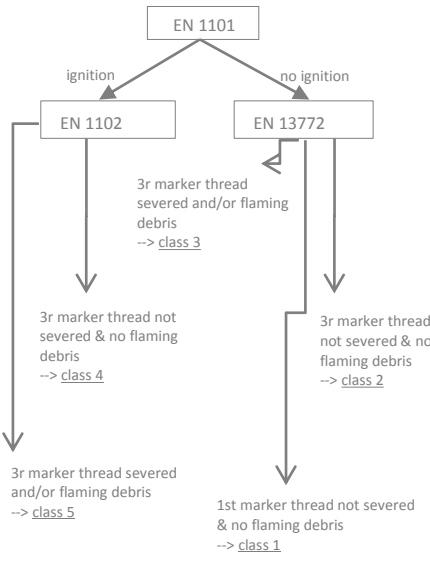


Document number:	<u>11-1379-EN</u>	Report date:	<u>29/07/2011</u>
Fabric reference:	<u>Blade</u> <u>08-berry</u> <u>(dye lot 0015-1107-16)</u>	Date analyses:	<u>29/07/2011</u>
Customer:	<u>BRU Textiles</u> <u>Satenrozen 2A</u> <u>B-2550 Kontich</u>	Place analyses:	<u>Labotex</u>
		Date of request:	<u>5/07/2011</u>
		Samples received	<u>5/07/2011</u>

Testing and conditioning in standard atmosphere, T (20+/-2)°C and RH (65+/-4)%

(This report has been fully revised because of its transfer to Sharepoint)

Specification	Results	Remarks	!																																																																					
<p><b>Burning behaviour of fabrics for curtains &amp; drapes</b></p> <p>EN 13773</p> <p><i>conditioning min. 24h in standard atmosphere</i></p> <p><i>used gas: propane</i> <i>flame height: 40mm</i> <i>bottom edge ignition</i></p> <p><u>flow chart EN 13773</u></p> 	<p>Test after washing as recommended (40°C, 600c)</p> <p>a) <u>EN 1101</u></p> <table border="1"> <thead> <tr> <th>flame application time</th> <th>warp</th> <th>weft</th> </tr> </thead> <tbody> <tr><td>1s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>2s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>3s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>4s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>5s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>10s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>15s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>20s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>20s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>20s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>20s</td><td>no ignition</td><td>no ignition</td></tr> <tr><td>20s</td><td>no ignition</td><td>no ignition</td></tr> </tbody> </table> <p>Mean ignition time warp: <u>NA</u></p> <p>Mean ignition time weft: <u>NA</u></p> <p>Minimum ignition time: <u>NA</u></p> <p>b) <u>EN 13772</u></p> <table border="1"> <thead> <tr> <th>warp</th> <th>face</th> <th>face</th> <th>reverse</th> <th>reverse</th> </tr> </thead> <tbody> <tr> <td>1st marker thread severed</td> <td>no</td> <td>no</td> <td>no</td> <td>no</td> </tr> <tr> <td>3rd marker thread severed</td> <td>no</td> <td>no</td> <td>no</td> <td>no</td> </tr> <tr> <td>time to severance 3rd marker thread (s)</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>destroyed length (mm)</td> <td>115</td> <td>121</td> <td>104</td> <td>118</td> </tr> <tr> <td>flaming debris</td> <td>no</td> <td>no</td> <td>no</td> <td>no</td> </tr> </tbody> </table>	flame application time	warp	weft	1s	no ignition	no ignition	2s	no ignition	no ignition	3s	no ignition	no ignition	4s	no ignition	no ignition	5s	no ignition	no ignition	10s	no ignition	no ignition	15s	no ignition	no ignition	20s	no ignition	no ignition	20s	no ignition	no ignition	20s	no ignition	no ignition	20s	no ignition	no ignition	20s	no ignition	no ignition	warp	face	face	reverse	reverse	1st marker thread severed	no	no	no	no	3rd marker thread severed	no	no	no	no	time to severance 3rd marker thread (s)	-	-	-	-	destroyed length (mm)	115	121	104	118	flaming debris	no	no	no	no		<input type="checkbox"/>
flame application time	warp	weft																																																																						
1s	no ignition	no ignition																																																																						
2s	no ignition	no ignition																																																																						
3s	no ignition	no ignition																																																																						
4s	no ignition	no ignition																																																																						
5s	no ignition	no ignition																																																																						
10s	no ignition	no ignition																																																																						
15s	no ignition	no ignition																																																																						
20s	no ignition	no ignition																																																																						
20s	no ignition	no ignition																																																																						
20s	no ignition	no ignition																																																																						
20s	no ignition	no ignition																																																																						
20s	no ignition	no ignition																																																																						
warp	face	face	reverse	reverse																																																																				
1st marker thread severed	no	no	no	no																																																																				
3rd marker thread severed	no	no	no	no																																																																				
time to severance 3rd marker thread (s)	-	-	-	-																																																																				
destroyed length (mm)	115	121	104	118																																																																				
flaming debris	no	no	no	no																																																																				

Document number:	<u>11-1379-EN</u>	Report date:	<u>29/07/2011</u>
Fabric reference:	<u>Blade</u> <u>08-berry</u> <u>(dye lot 0015-1107-16)</u>	Date analyses:	<u>29/07/2011</u>
Customer:	<u>BRU Textiles</u> <u>Satenrozen 2A</u> <u>B-2550 Kontich</u>	Place analyses:	<u>Labotex</u>
		Date of request:	<u>5/07/2011</u>
		Samples received	<u>5/07/2011</u>


Testing and conditioning in standard atmosphere, T (20+/-2)°C and RH (65+/-4)%

(This report has been fully revised because of its transfer to Sharepoint)

Specification	Results					Remarks	!
	weft	face	face	reverse	reverse		
1st marker thread severed	no	no	no	no	no		
3rd marker thread severed	no	no	no	no	no		
time to severance 3rd marker thread (s)	-	-	-	-	-		
destroyed length (mm)	109	131	122	110			
flaming debris	no	no	no	no	no		
c) <u>classification</u>							
	class 1	<u>  x  </u>					
	class 2	_____					
	class 3	_____					
	class 4	_____					



Labotex certifies that the results mentioned in this report are obtained after testing in accordance with the procedure and equipment specified by the concerned standards, unless noted differently.



Elke Dierck - Technical Manager

The results in this report only relate to the tested items.

Samples will be returned to the customer with the certificate, if possible. Samples will not be retained, unless specified by the customer. Retained samples will be kept for maximum one year unless a specific retention period is necessary.

This report can not be copied unless in its complete form and with written approval of Labotex.